



ETERNAL COLLECTION™

AGELESS BEAUTY. UNCOMPROMISED STRENGTH.

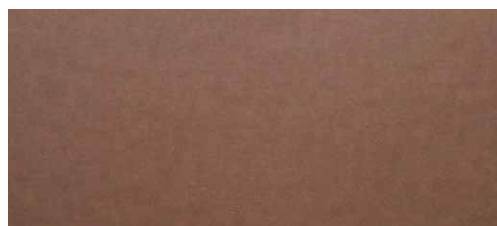

Ironstone

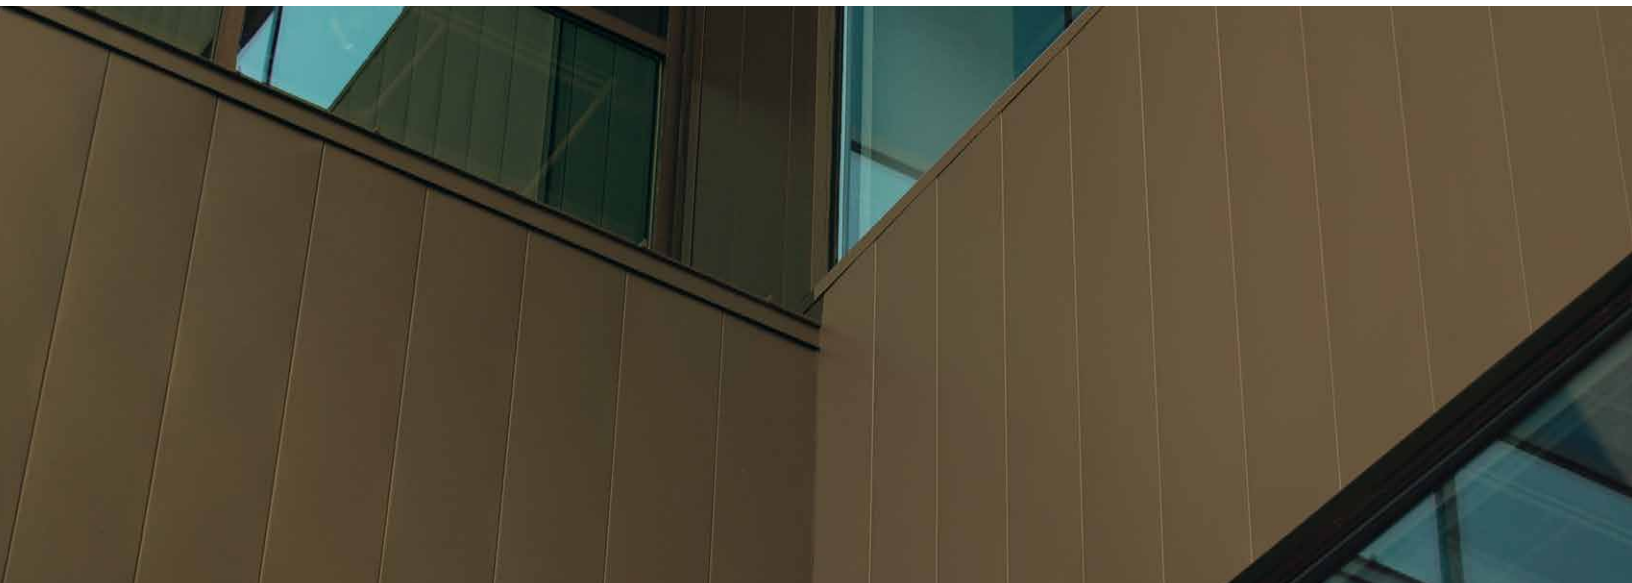

Rainforest



Sungold



Urban Slate

The Eternal Collection™ encompasses four elegant, inspiring colors exclusive to Steelscape. Providing the same engaging luster as Steelscape's Vintage®, the Eternal Collection expands the breadth of color options available to the design community.

The unique combination of pigmentation and gloss provides a rich, warm color and distinctive surface sheen. Designed to complement the dynamic qualities of the built environment, the Eternal Collection is the perfect finish for roofing and siding applications. Backed by the corrosion-resistance of ZINCALUME® and supported by a robust 20-year finish warranty, the Eternal Collection is the durable, yet distinctive finish for your next inspiring building design.


Due to the unique nature of this product, color may vary slightly from batch to batch. Batches should not be mixed on projects.

Steelscape is the market leader in high-quality metallic-coated and pre-painted steel.

Your business is our business... Steelscape is committed to offering its customers the best service in the industry, on-time delivery, and innovative solutions.

ETERNAL COLLECTION™

PERFORMANCE QUALITIES

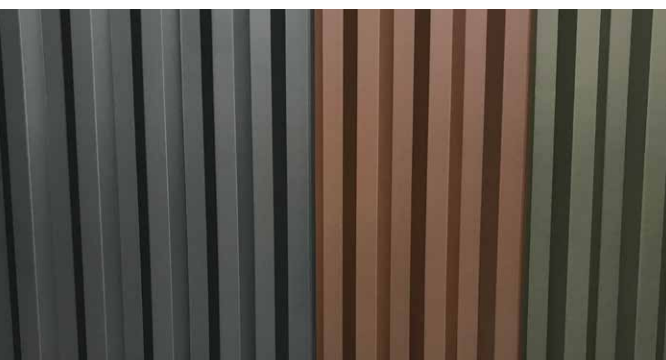

Substrate: (ASTM A792/A792M)	AZ50 ZINCALUME® Coated Steel
Finish:	Durable finish with a proprietary distinctive metallic luster using fluorocarbon pre-paint technology
Surface Appearance:	Smooth and free of blistering and other surface imperfections
Film Thickness: (ASTM D5796)	Top System Finish: 0.55 – 0.65 mil Bottom System Finish: Primer = 0.15 – 0.25 mil Backer = 0.30 – 0.40 mil
Specular Gloss: (ASTM D523)	60 Degree Specular Gloss = 5% - 20%; Sungold is 10% - 20%
Hardness: (ASTM D3363)	HB Min
Cure Test: (ASTM D5402)	50 Double MEK Rubs Minimum
Cross Hatch Adhesion: (ASTM D3359)	No Tape Off
Reverse Impact: (ASTM D2794)	No Tape Off, 80 inch-pounds of force
T-Bend Flexibility: (ASTM D4145)	2T No Tape Off
Humidity Resistance: (ASTM D2247)	1,000 Hours – Passes (100% RH @ 100 degrees F)
Salt Spray Resistance: (ASTM B117)	1,000 Hours – Passes (5% Salt Spray @ 95 degrees F)